

WETRO 1.0/2.0/3.0

25-Aug.-2016

1.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS

CE IP20 \varnothing 0,3m

1800-2850K | >80CRI | 400lm

black smoked
 copper plated

233189B9
233189P9

2.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS

CE IP20 \varnothing 0,3m

1800-2850K | >80CRI | 400lm

black smoked
 copper plated

233289B9
233289P9

3.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS


CE IP20 \varnothing 0,3m

1800-2850K | >80CRI | 400lm


black smoked
 copper plated

233389B9
233389P9

optional single ceiling base
optional multi ceiling bases

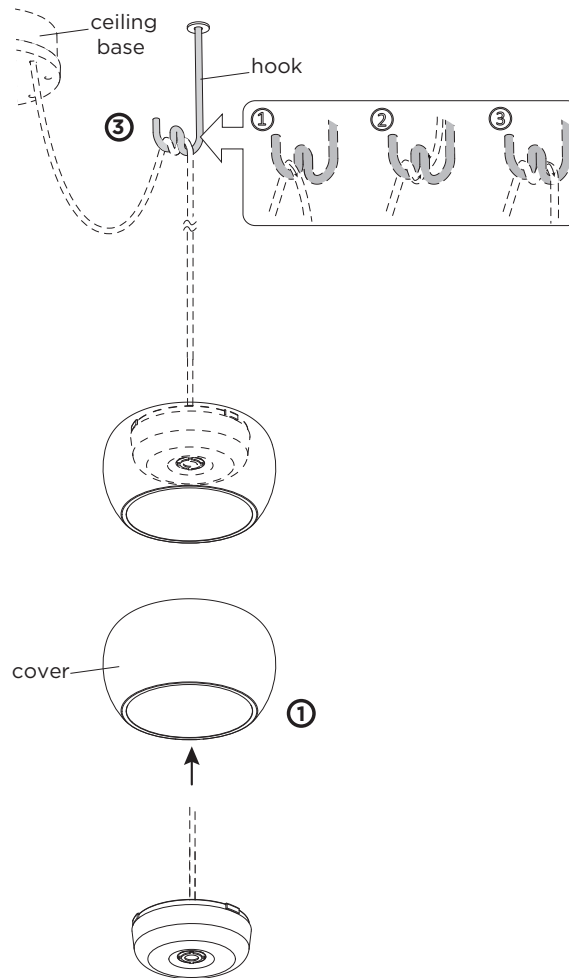

DIMENSIONS

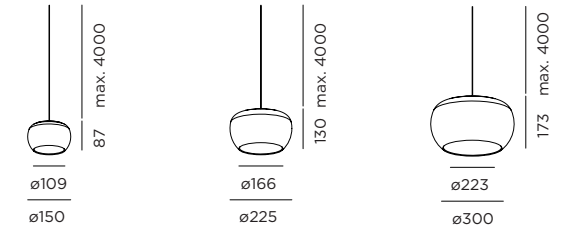

WETRO 1.0

WETRO 2.0

WETRO 3.0

MOUNTING INSTRUCTION

- Insert the LED module through the hole at the bottom of the cover.
- POWER CONNECTION**
Connect the power supply connection: STANDARD version
- Attach the cable to the hook according to the prescribed steps.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS